

STOP!
For use,
instructions and
customer service
information, see
instruction
manual.

Capacity: 5 lb / 2.2 kg


lb/kg oz/g
0

ON/OFF ON/TARE OFF

pelouze®

Model SP5



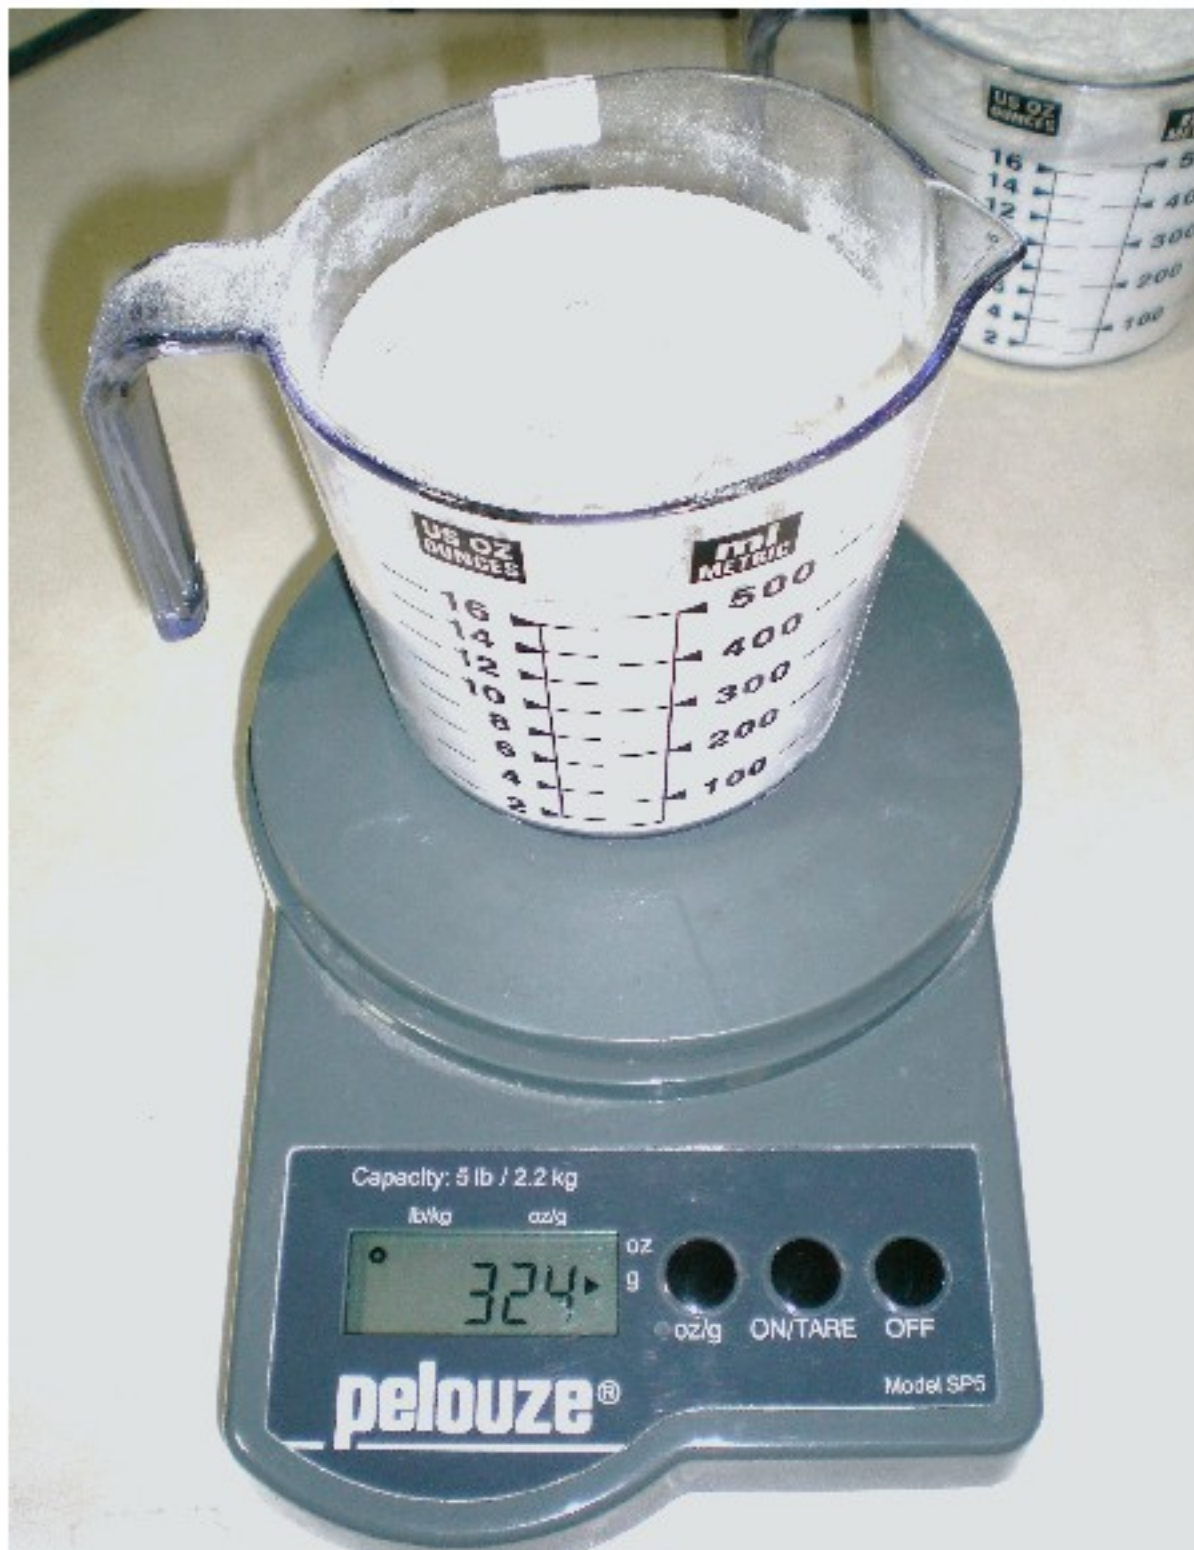



Capacity: 5 lb / 2.2 kg

lb/kg

oz/g

314

oz

g

oz/g

ON/TARE

OFF

pelouze®

Model SP5



		TEST RUN 5/22/2007					
		1 HYTECH	INSULAD	HEATSHIELD			AMBIENT
		TEMPERATURE	TEMPERATURE	TEMPERATURE			TEMPERATURE
		VOLUME IN CC	VOLUME IN CC	VOLUME IN CC			
		500 CC	500 CC	500 CC			
		WEIGHT IN GRAMS	WEIGHT IN GRAMS	WEIGHT IN GRAMS			
		207 GRAMS	197 GRAMS	42 GRAMS			
		4.92% HEAVIER	4.69% HEAVIER				
		TEMP		TEMP		TEMP	
		OVER		OVER		OVER	
		AMBIENT		AMBIENT		AMBIENT	
09:20 AM	150	77	147	74	133	60	73
09:25 AM	140	66	139	65	121	47	74
09:30 AM	128	51	125	50	108	31	75
09:35 AM	115	40	114	39	95	20	75
09:40 AM	108	32	107	31	90	14	76
09:45 AM	101	25	100	24	86	10	76
09:50 AM	95	19	95	19	84	8	76
09:55 AM	91	14	91	14	83	6	77
10:00 AM	88	12	89	13	82	6	76
10:05 AM	87	10	87	10	81	4	77
10:10 AM	85	8	85	8	81	4	77
10:15 AM	84	7	84	7	80	3	77
10:20 AM		77		74		60	77
10:25 AM		77		74		60	77
10:30 AM	82	77	82	74	80	60	77
AVERAGE TEMP.		592		576		393	1140
		15		15		15	15
OVER AMBIENT		29.47		29.4		28.2	78